KELLINGTON

DELANEY®

DIMENSIONS

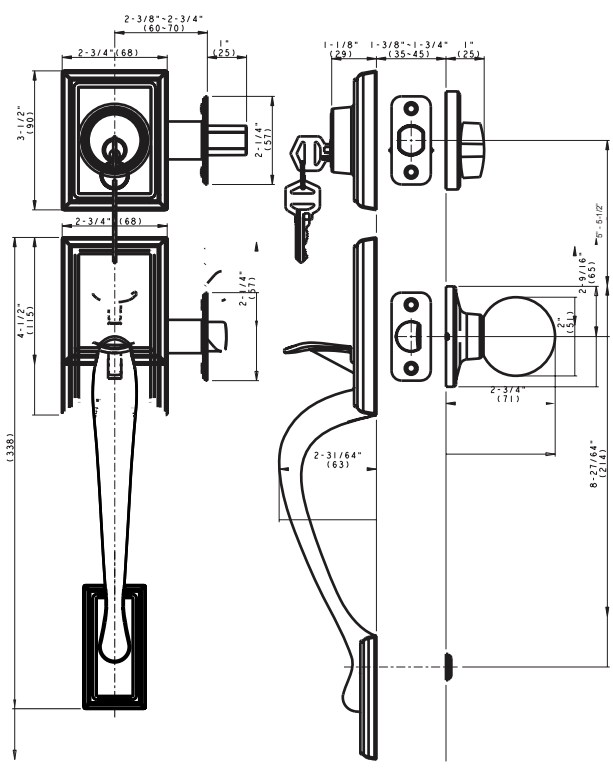

STANDARD SPECIFICATIONS

Door Prep	Deadbolt cross bore: 2-1/8" Handleset cross bore: 2-1/8" Edge bore: 1" Latch face: 1" x 2-1/4" Mounting (center to center): 5" - 5½" recommended
Backset	Fits 2-3/8" and 2-3/4"
Door Thickness	1-3/8" ~ 1-3/4" door standard 2-1/4" Ext. Kit available
Cylinder	KW1 5-pin **standard** SC1 5-Pin optional. Handlesets packed KD
Latches	Upper: 2-3/8" and 2-3/4" adjustable (9092) Faceplate: 1" x 2-1/4" round corner Bolt: Solid Brass with hardened steel rod, full 1" throw Lower: 2-3/8" and 2-3/4" adjustable (9080R) (for lever and knob) Faceplate: 1" x 2-1/4" round corner Bolt: Solid brass 1/2" throw Brass Lever Interior: 2-3/8" and 2-3/4" adjustable (9079R) Faceplate:1" x 2-1/4" round corner Bolt: Solid brass 1/2" throw.
Strikes	Deadbolt: 2-1/4" full lip round corner (9117 & 9113) Thumbpiece: 2-1/4" full lip round corner (9103)
Wood Screws	Combination screws that suit both wood or metal door mounting
Door Handing	Specify handing when ordering lever as interior option

Model	Function	WT/CTN	CTN QTY		US15 Satin Nickel	US26 Polished Chrome	US10B Oil Rubbed Bronze	US12P Tuscany Bronze
400-KN	Single Cylinder	33 Lbs	10 Pcs	Item No.	240600	240606	240607	240612
405-KN	Dummy	30 Lbs	10 Pcs	Item No.	240601	240616	240617	240657
410-KN	Double Cylinder	35 Lbs	10 Pcs	Item No.	241600	—	241607	241612

FUNCTIONS

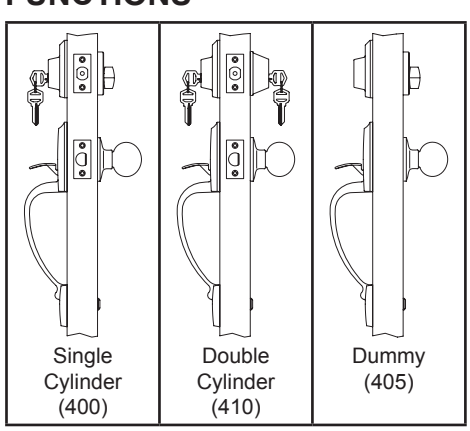

DELANEY®

Copyright © THE DELANEY CO. All rights reserved.