


# KERRY® GRADE 3

## DIMENSIONS



 LISTED Available

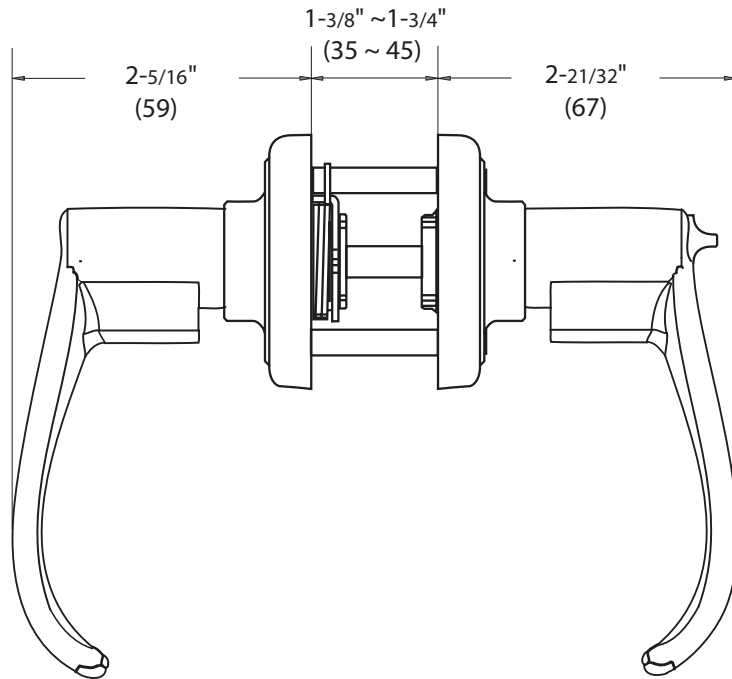

DELANEY®




## STANDARD SPECIFICATIONS

<b>Door Prep</b>	Cross bore: 2-1/8" Edge bore: 1" Latch face: 1" x 2-1/4"
<b>Backset</b>	Fits 2-3/8" and 2-3/4", UL Available
<b>Door Thickness</b>	1-3/8" ~ 1-3/4" door standard
<b>Cylinder</b>	KW1 5-pin <b>standard</b> (Solid Brass) SC1 5-Pin optional. Entries packed KA5
<b>Latches</b> <i>(6-Way Available)</i>	Entrance: 2-3/8" & 2-3/4" adjustable (9045R) Passage/Privacy: 2-3/8" & 2-3/4" adj. (9074) Faceplate: 1" x 2-1/4" round corner Bolt: 1/2" throw
<b>Strikes</b>	1-3/4" x 2-1/4" full lip round corner (9103)
<b>Wood Screws</b>	Combination screws that suit both wood or metal door mounting
<b>Door Handing</b>	Reversible

Model	Function	WT/ CTN	CTN QTY	US15 Satin Nickel		US12P Tuscany Bronze	
				Item No.		Item No.	
500T - KY	Entrance	26 Lbs	20 Pcs	Item No.	D20420		D20427
500T - KY	Push Button Entrance (Panic Proof)	26 Lbs	20 Pcs	Item No.	D20420P		D20427P
501T - KY	Passage	23 Lbs	20 Pcs	Item No.	D24420		D24427
502T - KY	Privacy	24 Lbs	20 Pcs	Item No.	D22420		D22427
502T - KY	Push Button Privacy (Panic Proof)	24 Lbs	20 Pcs	Item No.	D22420P		D22427P
515 - KY	Dummy	15 Lbs	20 Pcs	Item No.	D25420		D25427

## FUNCTIONS

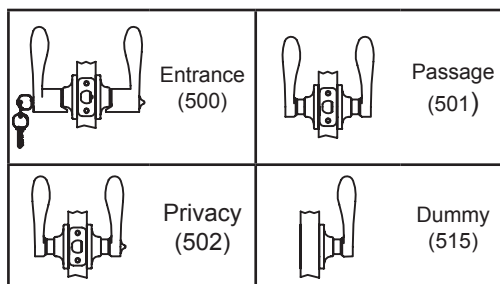

DELANEY®

Copyright © THE DELANEY CO. All rights reserved.