


SPRING HINGE 4" X 4"




SPECIFICATIONS

- #10 X 1/2" Machine screws (12-24NC) standard
- #10 x 1" Wood screws standard
- Gauge 0.106" Steel
- Box packed 1 Pair (2 pcs) per box
20 Pair / CTN, 32 Lbs
- Priced per pair (2 Hinges)
- Base Metal is Steel

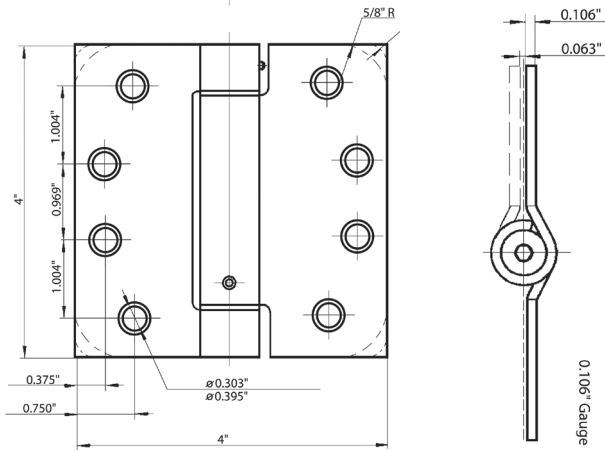

Description	Radius	US26D Dull Chrome		US10B Oil Rubbed Bronze	
		Item No.	SP4106	Item No.	SP4110
4" x 4" Spring Hinge	Sq.	List Price			
		Item No.	SP4506	Item No.	SP4510
4" x 4" Spring Hinge	5/8"	List Price			

SPRING HINGE 4 1/2" X 4 1/2"

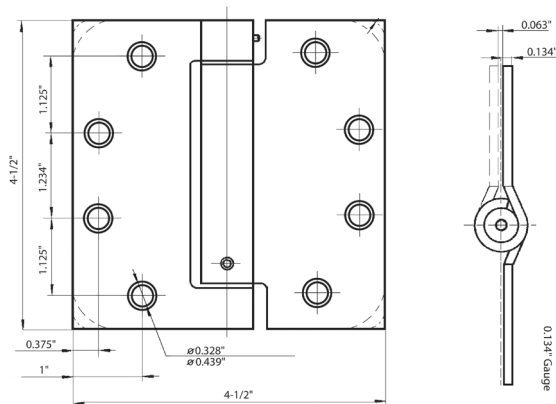

SPECIFICATIONS

- #12 X 1/2" Machine screws (12-24NC) standard
- #10 x 1 1/4" Wood screws standard
- Gauge 0.134" Steel
- Box packed 1 pair (2 pcs) per box
20 Pair / CTN, 47 Lbs
- Priced per pair (2 Hinges)
- Base Metal is Steel



Description	Radius	US26D Dull Chrome		US10B Oil Rubbed Bronze	
		Item No.	SP5506	Item No.	SP5510
4 1/2" x 4 1/2" Spring Hinge	Sq.	List Price			

SPRING HINGE SIZING GUIDE

MAXIMUM DOOR SIZE RECOMMENDED 3'-0" WIDE X 7'-0" HIGH				
RECOMMENDED MAXIMUM DOOR WEIGHT (LBS.)			HINGE SELECTION	
3.5 X 3.5	4 X 4	4.5 X 4.5	SPRING HINGES	BUTT HINGES
50	60	70	1 EACH	2 EACH
70	85	115	2 EACH	1 EACH
90	110	150	3 EACH	NONE

- Wind Conditions, excessive air pressure on one side of an opening, weather stripping, or other adverse job conditions may require the use of all spring hinges.
- For maximum versatility use all spring hinges.

