



ENSON GRADE 2

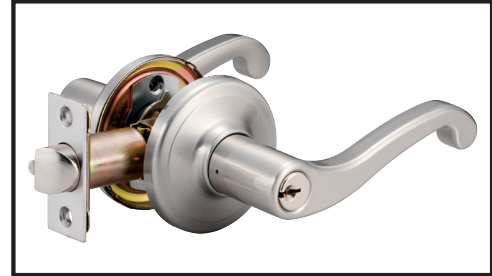

DIMENSIONS

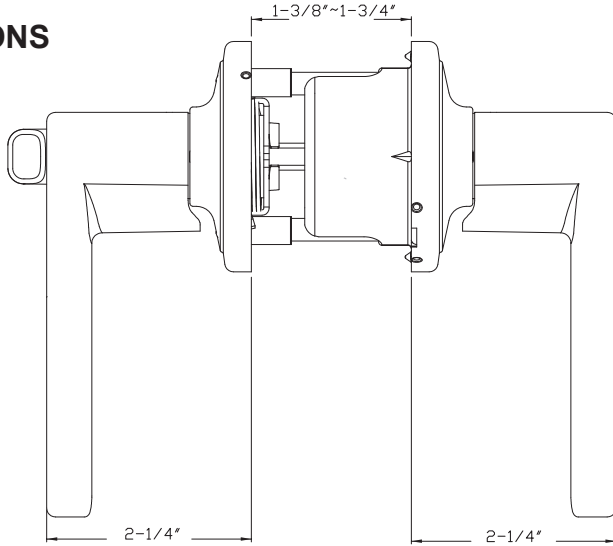

STANDARD SPECIFICATIONS




LISTED
Available



Door Prep	Cross bore: 2-1/8" Edge bore: 1" Latch face: 1" x 2-1/4"	Latches	Entrance: 2-3/8" & 2-3/4" adjustable (9060R UL) Passage/Privacy: 2-3/8" & 2-3/4" adjustable (9064R) Faceplate: 1" x 2-1/4" round corner Bolt: 1/2" throw
Backset	Fits 2-3/8" and 2-3/4"	Strikes	1-3/4" x 2-1/4" full lip round corner (9103)
Door Thickness	1-3/8" ~ 1-3/4" door standard	Wood Screws	Combination screws that suit both wood or metal door mounting
Cylinder	KW1 5-pin standard (Solid Brass) SC4 6-pin optional. Entries packed KA5	Door Handing	Entry, Passage, Privacy: Reversible Storeroom, Classroom, Dummy, Interior: Specify LH or RH
		Grade 2 Features	<ul style="list-style-type: none"> • Protective Collar • Reinforced Spring Assembly • Panic Proof • 3-Hr Fire Latch (500, 504, 509)

Model	Function	WT/CTN	CTN QTY	US15			
				Satin Nickel	Polished Chrome	Tuscany Bronze	
500TT-EN-G2	Entrance	24 Lbs	10 Pcs	Item No.	320720	320726	320727
501TT-EN-G2	Passage	22 Lbs	10 Pcs	Item No.	324720	324726	324829
502TT-EN-G2	Privacy	22 Lbs	10 Pcs	Item No.	322720	322726	322829
515TT-EN-G2	Dummy	21 Lbs	20 Pcs	Item No.	325720	325726	325829

FUNCTIONS

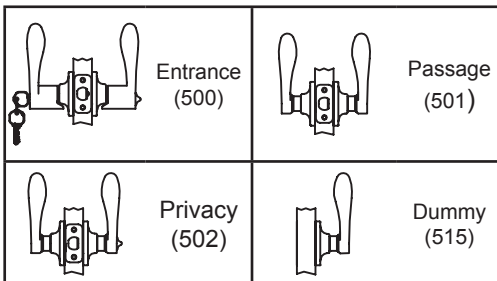

HANDING GUIDE

Standing OUTSIDE the private area, regardless of whether the door swings toward you or away from you, if the Hinges are on the left, order a Left Hand (LH) lock. Likewise, if the Hinges are on the right, order a Right Hand (RH) lock.

