


SILONA™ GRADE 3

CALLAN

DIMENSIONS

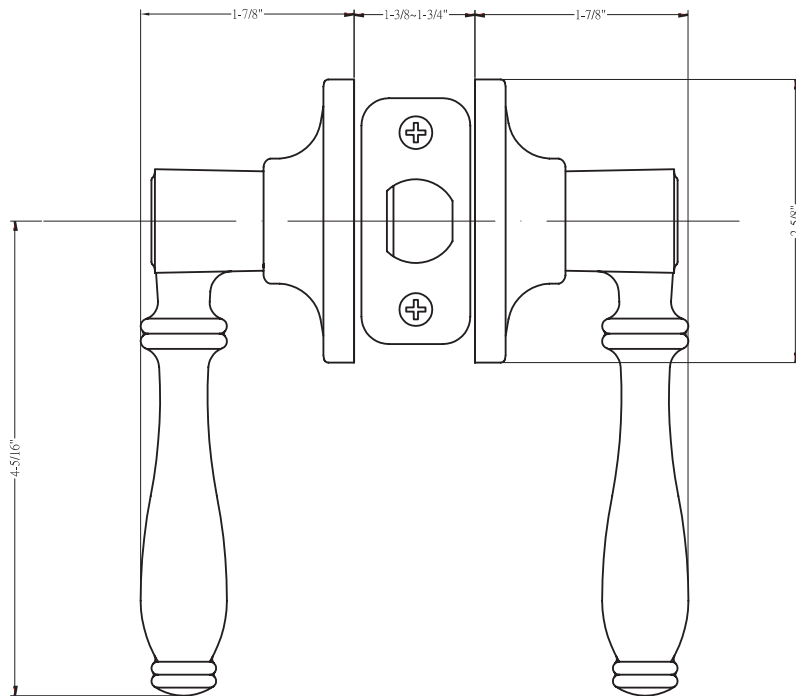


STANDARD SPECIFICATIONS

Door Prep	Cross bore: 2-1/8" Edge bore: 1" Latch face: 1" x 2-1/4"
Backset	Fits 2-3/8" and 2-3/4"
Door Thickness	1-3/8" ~ 1-3/4" door standard 2-1/4" Ext. Kit available
Cylinder	KW1 5-pin standard ; SC1 5-pin optional Entries packed KA5
Latches	Entrance: 2-3/8" & 2-3/4" adjustable (9073) Passage/Privacy: 2-3/8" & 2-3/4" adj. (9074) Faceplate: 1" x 2-1/4" round corner Bolt: 1/2" throw
Strikes	1-3/4" x 2-1/4" full lip round corner (9103)
Wood Screws	Combination screws that suit both wood or metal door mounting
Door Handing	Non-handed

Model	Function	WT/ CTN	CTN QTY	Finish				
				US15 Satin Nickel	US26 Polished Chrome	US10BE Edged Bronze	Antique Silver	
500T - SL	Entrance	35 Lbs	20 Pcs	Item No.	ST5101	ST5106	ST5107	ST5102
501T - SL	Passage	23 Lbs	20 Pcs	Item No.	ST5011	ST5016	ST5017	ST5012
502T - SL	Privacy	24 Lbs	20 Pcs	Item No.	ST5021	ST5026	ST5027	ST5022
515 - SL	Dummy	15 Lbs	20 Pcs	Item No.	ST5051	ST5056	ST5057	ST5052

FUNCTIONS

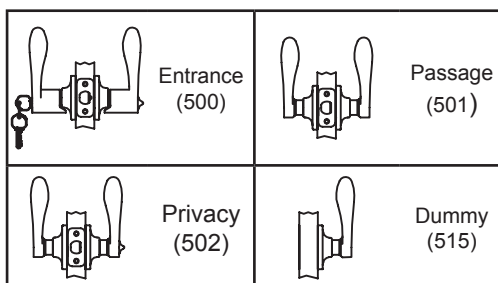

Extension Kits Available



DELANEY®

Copyright © DELANEY HARDWARE. All rights reserved.