


# F8100 SERIES (FIRE RATED) GRADE 1 FIRE EXIT HARDWARE VERTICAL ROD EXIT DEVICE



## DIMENSIONS

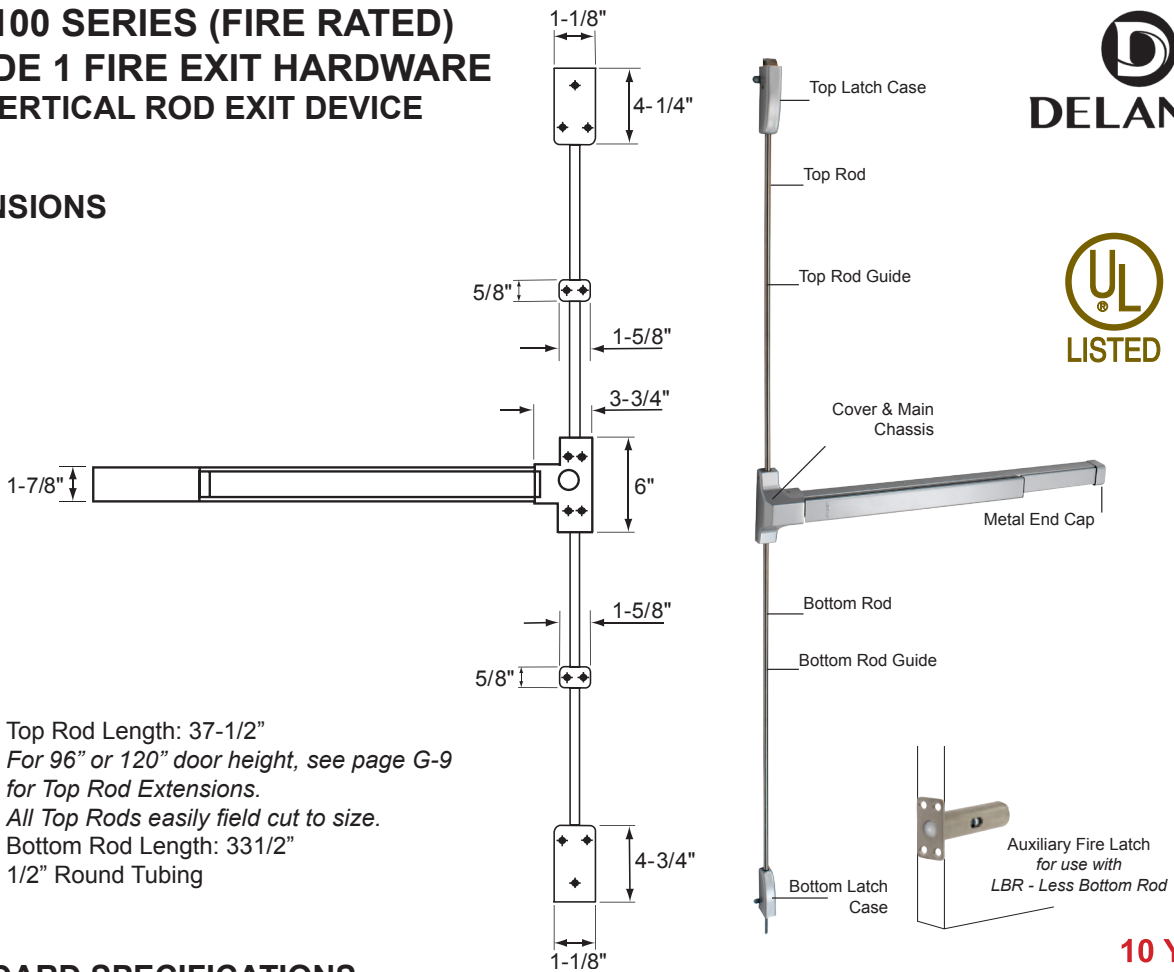

Top Rod Length: 37-1/2"  
For 96" or 120" door height, see page G-9  
for Top Rod Extensions.  
All Top Rods easily field cut to size.  
Bottom Rod Length: 33 1/2"  
1/2" Round Tubing

**10 YEAR  
WARRANTY**


## STANDARD SPECIFICATIONS

<b>Applications</b>	Offices, Schools, Hospitals, Apartments, Hotel/Motels & other Public Buildings	<b>Mounting</b>	Furnished standard with wood & machine screws. Sex nuts and bolts (1346) included.
<b>Door Size</b>	33" to 36" x 84". Top Rod Extension Available (up to 10'). Bar easily field cut to size.	<b>Latchbolt</b>	Stainless
<b>Stile Width</b>	3-1/2" minimum stile width required.	<b>Latchbolt Spring</b>	Stainless Steel throughout.
<b>Cover</b>	Zinc Alloy	<b>Strike</b>	#8171 Steel Strike for Top Case. #8178 Steel Strike for Bottom Case. #8285 Overlapping Strike.
<b>Chasis, End Cap &amp; Rail Assembly</b>	Fire Grade Steel: Painted Steel (Aluminum or Duro), Stainless Steel (US32D)	<b>UL &amp; ULC Listed</b>	3-Hour Fire Rating. Listed as Fire Exit Hardware. Conforms to standards UL 10C and UBS 7-2-1997 codes
<b>Rating</b>	ANSI 156.3 Grade 1	<b>Handing</b>	Reversible
<b>Door Prep</b>	Will cover stock hollow metal doors with 161 cutout	<b>Door Thickness</b>	1-3/4" ~ 2" standard, 2-1/4" optional

## ITEM DETAILS

Model	Description	WT/ CTN	QTY/ CTN	ALUMINUM	DURO	US32D Stainless Steel
F8100-3684	Fire Vertical Rod Type Device for 36" X 84" Door	52 Lbs	6	Item No. 684300	684302	684301
F8100-4884	Fire Vertical Rod Type Device for 48" X 84" Door	Lbs	6	Item No. —	—	684401

## EXTERIOR OPTIONS

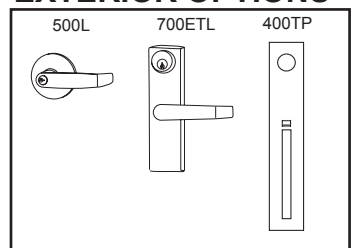

**DELANEY**

Copyright © DELANEY HARDWARE. All rights reserved.